

### DESCRIPTION

The MS3721 is a slim, plug-in PT transmitter that calculates the rms values of AC voltage signals from a PT, converts them into commonly used DC signals, and provides isolated single or dual output.

### ORDERING CODE

**Model** MS3721 - □ - □ □ □

#### Power Supply

**A:** 100 to 240V AC (50 to 60Hz)

**D:** 24V DC

**P:** 100 to 240V DC

#### Input (AC Voltage Signal)

**1:** 0 to 110V AC, 50/60Hz

**2:** 0 to 150V AC, 50/60Hz

**3:** 0 to 300V AC, 50/60Hz

**0:** Other AC voltage signal, 50/60Hz

#### Output 1

**A:** 4 to 20mA DC

**D:** 0 to 20mA DC

**Z:** Other DC current signal

**1:** 0 to 10mV DC

**2:** 0 to 100mV DC

**3:** 0 to 1V DC

**4:** 0 to 10V DC

**5:** 0 to 5V DC

**6:** 1 to 5V DC

**3W:**  $\pm 1$ V DC

**4W:**  $\pm 10$ V DC

**5W:**  $\pm 5$ V DC

**0:** Other DC voltage signal

#### Output 2

**No code:** None

**The codes are the same as for Output 1.**

Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.

Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550 $\Omega$  maximum for Output 1 and 350 $\Omega$  maximum for Output 2.

#### Options

**No code:** None


**/L:** Dual current output with high output load

\* Not subject to CE approval.

(OUT-1: 750 $\Omega$  / OUT-2: 550 $\Omega$ )

**/X:** Others (Special order)

\* For non-standard options, ask MTT for availability.

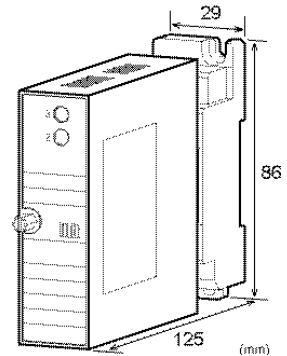

### ORDERING INFORMATION

To place an order, please use the ordering code format as shown on the left.

(e.g.) MS3721-A-2A6

#### Other Ordering Examples:

For an input code of "0": MS3721-A-0A6 (Input: 0 to 200V)

For an output code of "0": MS3721-A-2A0 (Output: 2 to 5V)

For an option code of "X": MS3721-A-2A6/X (0-90% response time: 100ms max.)

Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /LX).

### SPECIFICATIONS

#### POWER SECTION

Power Requirements	100 to 240V AC: 85 to 264V AC (47 to 63Hz) 24V DC: 24V DC±10% 100 to 240V DC: 85 to 264V DC		
Power Sensitivity	Better than ±0.1% of span for each power supply range.		
Power Line Fuse	160mA fuse is installed (standard).		
Power Consumption			
Power	100-240V AC	24V DC	100-240V DC
Single Output	4.5VA max	1.2W max	4.8W max
Dual Output	5.5VA max	1.6W max	6.0W max

#### INPUT SECTION

Input Resistance	1M $\Omega$ min. with or without power.		
Allowable Input Voltage	Continuous: 120% of the rated input value Instantaneous: 1.5 times the rated input value (within 5 seconds)		
Crest Factor	3 max.		
Ranges Available	Between 0-10mV AC and 0-300V AC.		

#### OUTPUT SECTION

Maximum Output Load			
Voltage Output (DC)	1V span and up	2mA max.	
	10mV	10k $\Omega$ min.	
	100mV	100k $\Omega$ min.	
Current Output (DC)	4-20mA single output	750 $\Omega$ max.	
	4-20mA dual output	Output 1: 550 $\Omega$ max.	
		Output 2: 350 $\Omega$ max.	

Zero Adjustment	Approx. $\pm 5\%$ of span. (Adjustable by the front-accessible trimmer.)	
Span Adjustment	Approx. $\pm 5\%$ of span. (Adjustable by the front-accessible trimmer.)	
Ranges Available	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%
* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.		
Output Spec. Ex.1: For 4 to 20mA output, the output span is 16mA and the bias +25%.		
Output Spec. Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.		

### ● PERFORMANCE

Accuracy Rating	Better than $\pm 0.25\%$ of span with at least 10% input (at $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ ).
Temperature Effect	Better than $\pm 0.2\%$ of span per $10^{\circ}\text{C}$ change in ambient.
Response Time	400ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	4-way isolation between input, output [Output 1/Output 2], power, and ground.
Insulation Resistance	100M $\Omega$ min. (@ 500V DC) between input, output [Output 1/Output 2], power, and ground.
Dielectric Strength	Input / Output [Output 1/Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.
Operating Environment	Ambient temperature: $-5$ to $55^{\circ}\text{C}$ Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	$-10$ to $60^{\circ}\text{C}$

### ● PHYSICAL

Installation	Wall/DIN rail mounting
Wiring	M3.5 screw terminal connection (with a power terminal block cover & drop-out prevention screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W29 $\times$ H86 $\times$ D125mm (including the mounting screw and socket)
Weight	Main unit: 120g max. Socket: 80g max.

### ● MATERIALS


Housing	ABS resin (UL 94V-0)
Terminal Block	PBT resin (UL 94V-0)
Terminal Block Cover	PC resin (UL 94V-2)
DIN Rail Stopper	PP resin (UL 94HB)
Screw Terminal	Nickel-plated steel
Contacts Material and Finish	Brass with 0.2 $\mu\text{m}$ gold plating
Printed Circuit Board	Glass fabric epoxy resin (FR-4: UL 94V-0)
Anti-Humidity Coating	HumiSeal <sup>®</sup> 1A27NS (Polyurethane)

\* HumiSeal<sup>®</sup> is a registered trademark of Chase Corporation.

### ● STANDARDS CONFORMITY

CE Directive Conformity	EMC Directive (2014/30/EU) EN61326-1: 2013 Low Voltage Directive (2014/35/EU) IEC61010-1/EN61010-1: 2010 Installation Category II Pollution Degree 2 Maximum operating voltage 300V Reinforced insulation between [input/output/GND] and power.
-------------------------	--

### TERMINAL ASSIGNMENT

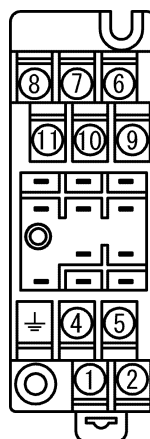

①	P (+)	POWER
②	N (-)	
⊥	GND	
④	+ OUTPUT 1	
⑤	- OUTPUT 1	
⑥	N.C.	
⑦	+ OUTPUT 2	
⑧	- OUTPUT 2	
⑨	N.C.	
⑩	L INPUT	
⑪	N INPUT	

## BLOCK DIAGRAM

