


MINIATURE ADJUSTABLE PRESSURE SWITCH

Adjustable Set Points from 0.1 to 100 in w.c.

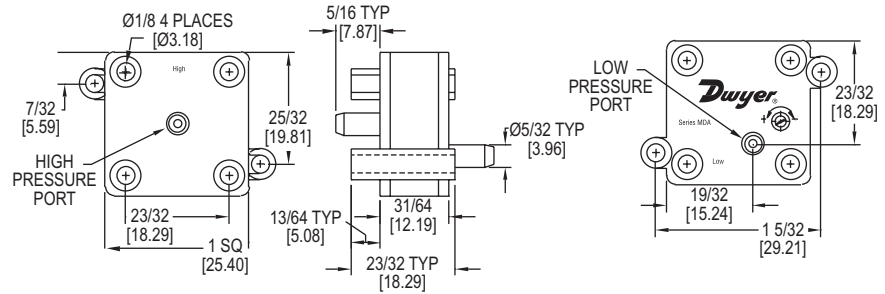

Series MDA Miniature Adjustable Pressure Switch is used to sense differential pressure. The switch features field adjustable set point and gold inlay contacts. Air or other compatible fluids can be used on the “high side”. The lightweight and compact size make the MDA ideal for any application with space constraints. Applications include industrial, HVAC, pump and motor control, medical, automotive, pools and spas.

FEATURES/BENEFITS

- Air or fluid on high side permits multiple uses where both air and liquids exist
- Small and lightweight for applications where space is constrained
- Gold contacts help ensure a clean connection without dirt or oxidation

APPLICATIONS

- Industrial
- Medical
- HVAC
- Pump and motor control
- Automotive
- Pools and spas

SPECIFICATIONS	
Switch Type: SPST normally open.	Electrical Connections: Terminals - 0.187” x 0.20: spade (recessed) for use with quick disconnects.
Switching Media: Air or compatible fluids on “high side”.	Pressure Connections: Smooth port 5/32” diameter for 1/8” ID tubing.
Pressure Limits: MDA-011: 4 psi; MDA-111: 8 psi; MDA-211: 8 psi; MDA-311: 15 psi; MDA-411: 30 psi.	Housing: Polycarbonate.
Current Rating: 40 mA resistive for life in excess of 20 million cycles.	Diaphragm Material: Polyurethane.
Temperature Limits: 40 to 150°F (4 to 66°C).	Operating Voltage: AC/DC - 30 V or less with resistive load.
Contacts: 18K gold inlay.	Mounting: Use #4 screws through mounting lugs or #2 screws through eyelets.
	Weight: Less than 0.353 oz (10 g).

MODEL CHART		
Model	Min. Set Point in w.c. (mbar)	Max. Set Point in w.c. (mbar)
MDA-011	0.1 (0.25)	0.5 (1.25)
MDA-111	0.5 (1.25)	2.0 (4.98)
MDA-211	2.0 (4.98)	15 (37.37)
MDA-311	15 (37.37)	60 (149.3)
MDA-411	60 (149.3)	100 (249.10)

Process Tubing Options: See page 503 (Gage Tubing Accessories)