

Large Size – Alloys

Sized for Deep Tanks and Rugged Duty

- ▶ Stainless Steel Construction
- ▶ Standard Lengths to 18 feet (549 cm)

These rugged transmitters are designed for tanks up to 18 feet (549 cm) in depth. Heavy duty stems resist turbulence, and float options accommodate liquids with minimum specific gravity as low as 0.53. Standard resolution is 1/2 inch; higher resolutions are available on request.



* Contact GEMS about solutions for deeper tanks.

Approvals

XM-36490 and XT-36490 Series transmitters may carry the following commercial approvals:

-  FM Approved, Explosion-Proof for lengths up to 10 feet (305 cm)
-  UL-Approved, Explosion-Proof

1. Mounting Types

| Series | XM/XT-66400 | XM/XT-36490 |
|----------------------|---|---|
| Mounting | 4" NPT | 5" ANSI Flanges; 150#, 300#, or 600# |
| |  |  |
| Stem Material | 316L Stainless Steel | 316L Stainless Steel |
| Mounting Material | 316L Stainless Steel; or Carbon Steel | 316L Stainless Steel; or Carbon Steel Flange |
| Float Stop Material | 316L Stainless Steel | 316L Stainless Steel |
| Overall Length, Max. | 216" (549 cm) | |

Note: XM/XT-36490 will be manufactured with matching Stem and Float Stop material. Consult factory for longer lengths.

Got Mud?






These Gems Alloy Float Level Sensors are the best, most reliable method to monitor mud pits. The large diameter, stainless steel stems are rugged and strong to handle heavily viscous mud and slurries. Use with the exceptionally-buoyant 8" float for best results.

ORDER IT!

Ordering is Easy! See Page C-15.
Easy online ordering too!



2. Float Types


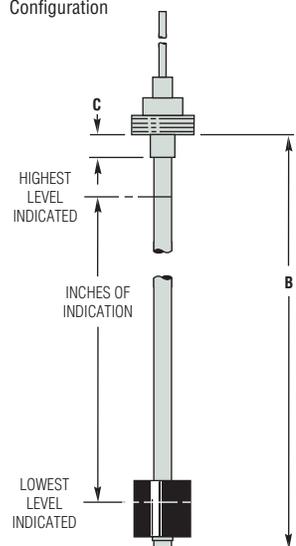
| Material | Buna N | 4" Dia. Syntactic Foam | 4" Dia. Stainless Steel | 4-1/2" Dia. Stainless Steel | 8" Dia. Stainless Steel** |
|---------------------------------|---|---|---|--|---|
| Float Dimensions |  |  |  |  |  |
| Part Number | 32230 | 31830 | 125520 | 35560 | 38609 |
| Minimum Liquid Specific Gravity | 0.59 | 0.87 | 0.57 | 0.78 | 0.53 |
| Operating Temperature | -40°F to +180°F (-40°C to +82°C) | -40°F to +225°F (-40°C to +107°C) | -40°F to +230°F (-40°C to +110°C) | | |
| Operating Pressure, Max* | 150 PSI (10 bar) | 2000 PSI (138 bar) | 15 PSI (1 bar) | 500 PSI (35 bar) | 150 PSI (10 bar) |

* Unit pressure rating is determined by the flange and float selected. Consult factory for higher pressure ratings.

** Float P/N 38609 must be installed on the transmitter stem from within the tank; or consult factory for larger flanges.

3. Dimensions

Typical Configuration



B: Overall Length = Inches of Indication + C + X (See Table at Right)

C: Distance From Bottom of Mounting to Float Stop (Customer Specified):
 • 1/2" (12.7mm) Minimum

Calculating Length

To find Overall Length when Inches or Indication is known:

- Inches of Indication + C* + X = Overall Length

To find Maximum Inches of Indication when Overall Length is known:

- Overall Length - C* - X = Maximum Inches of Indication

*C dimension is determined by customer.

Float Factor – X

| Float Part Number | X |
|-------------------|-----------------|
| 32230 | 6.75" (171.5) |
| 31830 | 6.75" (171.5) |
| 125520 | 7.75" (196.5) |
| 35560 | 6.75" (171.5) |
| 38609 | 11.375" (288.9) |

Inch (mm)

4. Input/Output

For XM- Series, no special output designation is necessary.

For XT- Series, specify the desired signal conditioning by Part Number.

Additional information about GEMS signal conditioning modules is found on Page C-16.

| Series | Input Voltage | Output Signal | Part Number | Electrical Termination |
|-----------|---------------|----------------------|--------------|---|
| XM-36490 | 10 to 30 VDC | Proportional Voltage | — | Junction Box |
| XM-66400 | | | | Cable, (4) Conductor, 30 ft. long, Nitrile Jacket |
| XT-Series | 8 to 24 VDC | 0-5 VDC | 52532 | Junction Box |
| | 15 to 30 VDC | 0-12 VDC | 52533 | |
| | 10 to 40 VDC | 4-20 mA | 52550 | Panel Mount with Plug-In Base |
| | 4-20 mA | 112300 ⚡ | | |

⚡ = Stock item

| | |
|--|--|
|  <p>Photocopy This Form Use one form for each product type you are selecting. <small>This form may also be completed online at gemssensors.com for RFQ.</small></p> | This is a <input type="checkbox"/> Request for a Quote <input type="checkbox"/> Order P.O.# _____ Name _____ Company _____ Quantity Needed _____ Street _____ Date Required ____/____/____ City _____ State ____ Zip _____ Shipping Method: _____ Phone (____) _____ Partial Accepted: <input type="checkbox"/> Yes <input type="checkbox"/> No Fax (____) _____ |
|--|--|

Float Type Level Transmitters – Large Size

Application Environmental Conditions

This information is essential to the accurate and proper operation of your GEMS configurable sensors. Please complete fully and accurately.

- | | |
|---|--|
| 1. Liquid Media: _____ 2. Pressure: Minimum _____ psig Maximum _____ psig 3. Temperature: Minimum _____ °F Maximum _____ °F 4. Specific Gravity: Minimum _____ Maximum _____ | 5. Viscosity: _____ SSU 6. Tank Material: _____ Tank Depth: _____ 7. Unit is Mounted In: <input type="checkbox"/> Tank Top <input type="checkbox"/> Tank Bottom |
|---|--|

1. Series:

- XM/XT-66400 XM/XT-36490

2. Mounting Type:

- 4" NPT (66400)
 Flange Size: 4" 5" 6"
 Flange: 150# 300# 600# (36490 Series Only)

3. Material:

- a. Stem: 316L Stainless Steel
 b. Mounting:
 36990: 316L Stainless Steel Carbon Steel
 66400: 316L Stainless Steel

4. Float Type P/N – Description:

- 32230 – Buna N
 125520 – 4" Stainless Steel
 35560 – 4-1/2" Stainless Steel
 38609 – 8" Stainless
 31830 – 4" Syntactic Foam

5. Dimensions:

| Float Selected | Indicating Length (Whole Inches) | + | C Dimension (1/2" min.) | + | Float Factor X | = | Overall Length (180" (457.2 cm), Max.) |
|----------------|-------------------------------------|---|-------------------------------|---|--------------------|---|---|
| 31830 | | | | | | | |
| 32230 | | + | | + | 6.75" (171.5 mm) | = | |
| 35560 | | | | | | | |
| 38609 | | + | | + | 11.375" (288.9 mm) | = | |
| 125520 | | + | | + | 7.75" (196.8 mm) | = | |

Note: Indicating Length = Whole Inch Increments

6. Input/Output:

- a. Optional 24 VDC Power Supply:
 115 VAC input
 230 VAC input
- b. Signal Conditioners:
 52550 (4-20 mA)
 52532 (0-5 VDC)
 52533 (0-12 VDC)

Please contact Gems for any configuration or special requirements not covered on this form. **800-378-1600**

Quote: \$ _____ Date Quoted: ____/____/____



Gems Sensors & Controls
 One Cowles Road
 Plainville, CT
 06062-1198

tel 860.747.3000
 fax 860.747.4244
www.gemssensors.com