




DESCRIPTION

The MS3110 is a terminal block type potentiometer transmitter that detects changes in the resistance of potentiometric sensors, converts them into commonly used DC signals and provides an isolated dual output.


ORDERING CODE

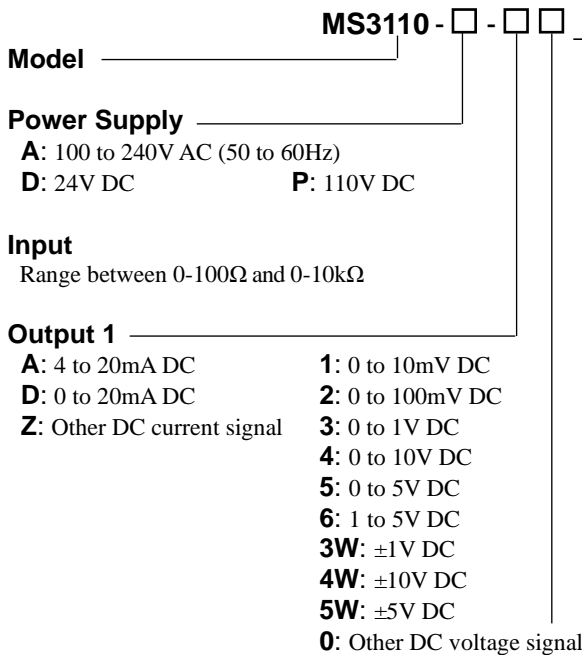

Output 2 _____
The codes are the same as for Output 1.

Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.
Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550Ω maximum for Output 1 and 350Ω maximum for Output 2.

Options _____
No code: None
/K: Fast response (0 to 90% response time: 10ms max.)
/X: Special order
 * For non-standard options, ask MTT for availability.

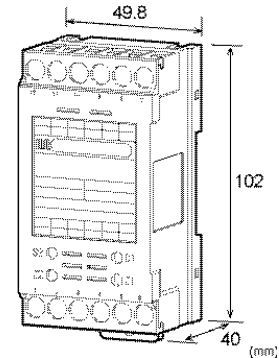

ORDERING INFORMATION

To place an order, please use the ordering code format as shown on the left.
(e.g.) MS3110-A-A6
* Factory default: Factory testing is carried out with an input range of 0 to 5kΩ.

Other Ordering Examples:
For an output code of "0": MS3110-A-00 (Output: 2 to 5V)
For a specific resistance range: MS3110-A-AA (0 to 500Ω)
(When you specify a resistance range, our factory performs the test accordingly, the fact of which will be indicated in the label attached.)
For an option code of "X": MS3110-A-AA/X (Response frequency: 50Hz)
Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /KX).

SPECIFICATIONS

POWER SECTION

Power Requirements	100 to 240V AC: 85 to 264V AC (47 to 63Hz)		
	24V DC: 24V DC±10%		
	110V DC: 90 to 121V DC		
Power Sensitivity	Better than ±0.1% of span for each power supply range.		
Power Line Fuse	160mA fuse		
Maximum Power Consumption			
Power	100-240V AC	24V DC	110V DC
	Approx. 7.0VA	Approx. 1.5W	Approx. 2.5W

INPUT SECTION

Input Signal	Range between 0-100Ω and 0-10kΩ.
Measuring Voltage	Approx. 0.5V
Allowable Lead Wire Resistance	10% or less of total resistance per wire. (The resistance of all three wires must be equal.)

● **OUTPUT SECTION**

Allowable Output Load		
Voltage Output (DC)	1V span and up 10mV 100mV	2mA max. 10kΩ min. 100kΩ max.
Current Output (DC)	4-20mA single output 4-20mA dual output	750Ω max. Output 1: 550Ω max. Output 2: 350Ω max.
Zero Adjustment	Output 1: Approx. 0 to 30% of total resistance. Output 2: Approx. ±5% of span. (Adjustable by the front-accessible trimmers.)	
Span Adjustment	Output 1: Approx. 70 to 100% of total resistance. Output 2: Approx. ±5% of span. (Adjustable by the front-accessible trimmers.)	
Ranges Available		
	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%
* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.		
Output Spec. Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.		
Output Spec. Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.		

● **PERFORMANCE**

Accuracy Rating	Better than ±0.2% of span (at 25°C±5°C).
Temperature Effect	Better than ±0.2% of span per 10°C change in ambient.
Response Time	170ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	5-way isolation between input, output 1, output 2, power, and ground.
Insulation Resistance	100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
Dielectric Strength	Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.
Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C

● **PHYSICAL**

Installation	DIN rail mounting
Wiring	M3.5 screw terminal connection (with drop-proof screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W49.8 × H102.0 × D40.0mm
Weight	140g max.

● **MATERIALS**


Housing	ABS resin (UL 94V-0)
Screw Terminal	Nickel-plated steel
Printed Circuit Board	Glass fabric epoxy resin (FR-4: UL 94V-0)
Conformal Coating	HumiSeal® 1A27NSLU (Polyurethane)

* HumiSeal® is a registered trademark of Chase Corporation.

● **STANDARDS CONFORMITY**

EC Directive Conformity	EMC Directive (2014/30/EU) EN61326-1: 2013 Low Voltage Directive (2014/35/EU) IEC61010-1/EN61010-1: 2010 Installation Category II Pollution Degree 2 Maximum operating voltage 300V Reinforced insulation between [input/output/GND] and power.
-------------------------	--

TERMINAL ASSIGNMENT

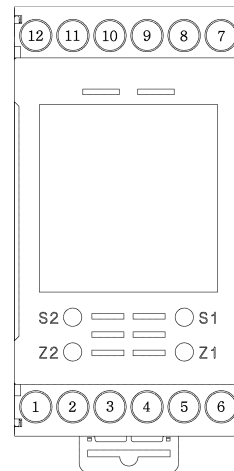

①	+ OUTPUT 2
②	- OUTPUT 2
③	N.C.
④	P (+)
⑤	N (-)
⑥	GND
⑦	A
⑧	B
⑨	C
⑩	N.C.
⑪	+ OUTPUT 1
⑫	- OUTPUT 1

BLOCK DIAGRAM

