



DESCRIPTION

The MS3001 is a terminal block type thermocouple temperature transmitter that converts input signals from a thermocouple into commonly used DC signals and provides an isolated single output.

ORDERING CODE

MS3001 - [] - [] - []

Model _____

Power Supply _____

D: 24V DC **Q:** 12V DC*

* The 12V DC version is not subject to CE approval.

Input _____

K: Type K thermocouple	B: Type B thermocouple
E: Type E thermocouple	R: Type R thermocouple
J: Type J thermocouple	S: Type S thermocouple
T: Type T thermocouple	N: Type N thermocouple
	0: Other than those above.


Output _____

A: 4 to 20mA DC	1: 0 to 10mV DC
D: 0 to 20mA DC	2: 0 to 100mV DC
Z: Other DC current signal	3: 0 to 1V DC
	4: 0 to 10V DC
	5: 0 to 5V DC
	6: 1 to 5V DC
	1W: ±10mV DC
	2W: ±100mV DC
	3W: ±1V DC
	4W: ±10V DC
	5W: ±5V DC
	0: Other DC voltage signal

Note: Upscale burnout protection is standard.

Options

- No code:** None
 - /D:** Downscale burnout protection
 - /K:** Fast response (0 to 90% response time: 10ms max.)
 - /X:** Others (Special order)
- * For non-standard options, ask MTT for availability.

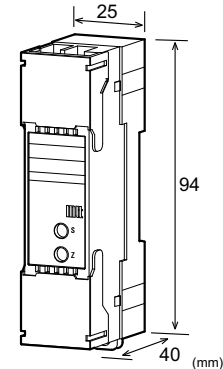

ORDERING INFORMATION

To place an order, please use the ordering code format as shown on the left. Also specify a measuring temperature range.

(e.g.) MS3001-D-K6 (0 to 500°C)

* Note that the temperature range should be specified in steps of at least 10 degrees Celsius.

Other Ordering Examples:
 For an input code of "0": MS3001-D-0A (WRe5-26 0 to 2000°C)
 For an output code of "0": MS3001-D-K0 (0 to 1000°C / Output: 2 to 5V)
 For an option code of "X": MS3001-D-KA/X (0 to 600°C / No linearizer.)
 Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /KX).

POWER SECTION

Power Requirements	24V DC: 24V DC±10%	12V DC: 12V DC±20%
Power Sensitivity	Better than ±0.1% of span for each power supply range.	
Power Line Fuse	250mA fuse is installed (standard).	
Power Consumption	24V DC	12V DC
Power	50mA max.	100mA max.
Current Output	35mA max.	55mA max.
Voltage Output	Note: The above figures are in the condition of the rated voltage supplied.	

INPUT SECTION

Input Resistance	With or without power: 1MΩ min.
Allowable Signal Source Resistance	1kΩ max.
Allowable Input Voltage	30V DC max., continuous.
Cold Junction Compensation	A built-in temperature-sensitive resistor is used.
Cold Junction Compensation Error	±0.5°C max. (25°C±15°C)
Linearizer	Built-in analog linearizer (6 segments maximum)

Ranges Available
<Standard specifications> (Temp at 0% input = 0°C)

K	Specify between 0-100°C and 0-1350°C in steps of 50°C (e.g. K 0 to 350°C).
E	Specify between 0-100°C and 0-1000°C in steps of 50°C (e.g. E 0 to 150°C).
J	Specify between 0-100°C and 0-800°C in steps of 50°C (e.g. J 0 to 550°C).
T	Specify between 0-100°C and 0-400°C in steps of 50°C (e.g. T 0 to 250°C).
B	Specify between 0-1200°C and 0-1800°C in steps of 100°C (e.g. B 0 to 1700°C).
R	Specify between 0-400°C and 0-1700°C in steps of 100°C (e.g. R 0 to 1400°C).

<Quasi-standard specifications>

Type	Temperature Range (°C)	(+) Bias	(-) Bias
K	-200 to +1370	Up to 5x input span.	Up to 1x input span.
E	-200 to +1000	Up to 3x input span.	Up to 0.5x input span.
J	-200 to +1200	Up to 5x input span.	Up to 0.5x input span.
T	-200 to +400	Up to 2x input span.	Up to 0.5x input span.
B	0 to +1820	Up to 5x input span.	N/A
R	-50 to +1760	Up to 10x input span.	No limitation.
S	-50 to +1760	Up to 10x input span.	No limitation.
N	-200 to +1300	Up to 5x input span.	Up to 0.5x input span.

Input Spec Ex. 1: For K -100 to 400°C, the input span is 500°C and the bias -0.2x the input span.

Input Spec Ex. 2: For J 300 to 400°C, the input span is 100°C and the bias 3x the input span.

Note 1: Input span: 3mV min.

Note 2: For input temperature ranges starting from any specified temperature below 0°C, the accuracy may be partly out of specification.

Note 3: For the type B thermocouple, the accuracy in the temperature range below 600°C is not guaranteed.

Note 4: Any specification out of the temperature range or bias requirement listed above is handled as a special order.

● OUTPUT SECTION

Allowable Output Load

Voltage Output (DC)	1V span and up	2mA max.
	10mV	10kΩ min.
	100mV	100kΩ min.
Current Output (DC)		550Ω max.

Zero Adjustment Approx. ±2.5% of span. (Adjustable by the front-accessible trimmer.)

Span Adjustment Approx. ±2.5% of span. (Adjustable by the front-accessible trimmer.)

Burnout Protection Standard: Upscale (Downscale is optional.)

Ranges Available

	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%

* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.

Output Spec Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.

Output Spec Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.

● PERFORMANCE

Accuracy Rating

Better than ± [0.1% of span + 0.5°C {Cold junction compensation error} + Linearity error] (at 25°C±5°C)

Note: Linearity errors vary with input spans.

Input Span	Linearity Error (%)	Input Span	Linearity Error (%)
JIS K 0-300°C	0.1	JIS K 0-600°C	0.15
JIS J 0-200°C	0.15	JIS E 0-200°C	0.15
JIS E 0-600°C	0.25	JIS R 0-1600°C	0.5
JIS S 0-1000°C	0.25	JIS T 0-300°C	0.25

Temperature Effect	Better than ±0.2% of span per 10°C change in ambient.
Response Time	160ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	3-way isolation between input, output, and power.
Insulation Resistance	100MΩ min. (@ 500V DC) between input, output, and power.
Dielectric Strength	Input / Output / Power: 1500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989
Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C

● PHYSICAL

Installation	DIN rail mounting
Wiring	M3.5 screw terminal connection (with drop-out prevention screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W25.0 × H94.0 × D40.0 mm
Weight	90g max.

● MATERIALS


Housing	ABS resin (UL 94V-0)
Screw Terminal	Nickel-plated steel
Printed Circuit Board	Glass fabric epoxy resin (FR-4: UL 94V-0)
Anti-Humidity Coating	HumiSeal® 1A27NSLU (Polyurethane)

* HumiSeal® is a registered trademark of Chase Corporation.

● STANDARDS CONFORMITY

EC Directive Conformity	EMC Directive (2014/30/EU) EN61326-1: 2013
-------------------------	--

TERMINAL ASSIGNMENT



①	P (+)
②	N (-)
③	N.C.
④	N.C.
⑤	OUTPUT +
⑥	OUTPUT -
⑦	+ POWER
⑧	- POWER

BLOCK DIAGRAM

