

DESCRIPTION

The MS3704-S is a slim, plug-in high-level signal conditioner (isolator) that converts DC current or voltage signals into commonly used DC signals and provides isolated single or dual output. This model operates with a 24V AC power supply.

ORDERING CODE

MS3704 - S -

Model _____

Power Supply _____
S: 24V AC (50 to 60Hz)

Input _____

A: 4 to 20mA DC	3: 0 to 1V DC
B: 2 to 10mA DC	4: 0 to 10V DC
C: 1 to 5mA DC	5: 0 to 5V DC
D: 0 to 20mA DC	6: 1 to 5V DC
E: 4 to 20mA DC *1	4W: ±10V DC
H: 10 to 50mA DC	5W: ±5V DC
Z: Other DC current signal	0: Other DC voltage signal

*1: Shunt resistor 50Ω

Output 1 _____

A: 4 to 20mA DC	1: 0 to 10mV DC
D: 0 to 20mA DC	2: 0 to 100mV DC
Z: Other DC current signal	3: 0 to 1V DC
	4: 0 to 10V DC
	5: 0 to 5V DC
	6: 1 to 5V DC
	3W: ±1V DC
	4W: ±10V DC
	5W: ±5V DC
	0: Other DC voltage signal

Output 2 _____

No code: None
The codes are the same as for Output 1.


Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.

Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550Ω maximum for Output 1 and 350Ω maximum for Output 2.

Options _____

No code: None
/K: Fast response (0 to 90% response time: 10ms max.)
/X: Others (Special order)

* For non-standard options, ask MTT for availability.

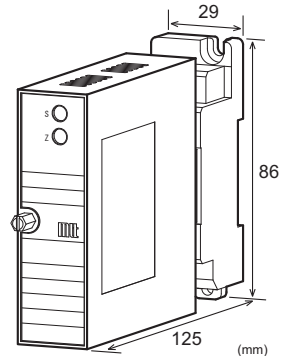
ORDERING INFORMATION

To place an order, please use the ordering code format as shown on the left.
(e.g.) MS3704-S-AA6

Other Ordering Examples:

For an input code of "Z": MS3704-S-ZAA (Input: 8 to 20mA)

For an output code of "0": MS3704-S-A60 (Output: 2 to 5V)

For an option code of "X": MS3704-S-66/X (0-90% response time: 5ms max.)

Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /KX).

SPECIFICATIONS
POWER SECTION

Power Requirement	24V AC: 24V AC±15% (47 to 63Hz)
Power Sensitivity	Better than ±0.1% of span.
Power Line Fuse	160mA fuse is installed (standard).
Power Consumption	
Single Output	2.0VA max.
Dual Output	2.5VA max.

INPUT SECTION

Input Resistance		
Voltage Input (DC)	With or without power:	1MΩ min.
Current Input (DC)	4 to 20mA (std.)	250Ω
	2 to 10mA	250Ω
	1 to 5 mA	100Ω
	0 to 20mA	250Ω
	10 to 50mA	10Ω

Allowable Input Voltage

Voltage Input Model	30V DC max., continuous. (Standard for a span: up to 10V)
Current Input Model	40mA DC max., continuous. (Standard for 4 to 20mA)

Ranges Available		
	Current Signal	Voltage Signal
Input Range (DC)	-100 to 100mA	-300 to 300V
Input Span (DC)	100 μ A ⁽¹⁾ to 200mA	200mV ⁽²⁾ to 600V
Input Bias	-100 to 100%	-100 to 100%

Note: For any input range including negative input signals, the input spans for current and voltage signals range from ⁽¹⁾200 μ A to 200mA and ⁽²⁾400mV to 600V, respectively.

Input Spec. Ex. 1: For 3 to 8V input, the input span is 5V and the bias +60%.

Input Spec. Ex. 2: For -5 to 0V input, the input span is 5V and the bias -100%.

● OUTPUT SECTION		
Maximum Output Load		
Voltage Output (DC)	1V span and up	2mA max.
	10mV	10k Ω min.
	100mV	100k Ω min.
Current Output (DC)	4-20mA single output	750 Ω max.
	4-20mA dual output	Output 1: 550 Ω max. Output 2: 350 Ω max.
Zero Adjustment	Approx. \pm 5% of span. (Adjustable by the front-accessible trimmer.)	
Span Adjustment	Approx. \pm 5% of span. (Adjustable by the front-accessible trimmer.)	

Ranges Available		
	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%

* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.

Output Spec. Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.

Output Spec. Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.

● PERFORMANCE	
Accuracy Rating	Better than \pm 0.1% of span (at 25°C \pm 5°C).
Temperature Effect	Better than \pm 0.2% of span per 10°C change in ambient.
Response Time	85ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	4-way isolation between input, output (Output 1/Output 2), power, and ground.
Insulation Resistance	100M Ω min. (@ 500V DC) between input, output (Output 1/Output 2), power, and ground.
Dielectric Strength	Input / Output (Output 1/Output 2) / Power, Ground: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.


Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C

● PHYSICAL	
Installation	Wall/DIN rail mounting
Wiring	M3.5 screw terminal connection (with a power terminal block cover & drop-out prevention screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W29 x H86 x D125mm (including the mounting screw and socket)
Weight	Main unit: 120g max. Socket: 80g max.

● MATERIALS	
Housing	ABS resin (UL 94V-0)
Terminal Block	PBT resin (UL 94V-0)
Terminal Block Cover	PC resin (UL 94V-2)
DIN Rail Stopper	PP resin (UL 94HB)
Screw Terminal	Nickel-plated steel
Contacts Material and Finish	Brass with 0.2 μ m gold plating
Printed Circuit Board	Glass fabric epoxy resin (FR-4: UL 94V-0)
Anti-Humidity Coating	HumiSeal [®] 1A27NS (Polyurethane)

* HumiSeal[®] is a registered trademark of Chase Corporation.

TERMINAL ASSIGNMENT

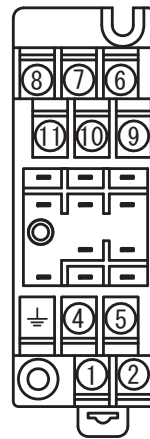

①	P (+)	POWER
②	N (-)	
⊥	GND	
④	+ OUTPUT 1	
⑤	- OUTPUT 1	
⑥	N.C.	
⑦	+ OUTPUT 2	
⑧	- OUTPUT 2	
⑨	N.C.	
⑩	+ INPUT	
⑪	- INPUT	

BLOCK DIAGRAM

