

DESCRIPTION

The MS3707G is a slim, plug-in distributor that powers a two-wire level gauge, converts its 4 to 20mA signals into commonly used DC signals, and provides isolated single or dual output. A wide span adjustment range allows the unit to be used for level gauges with different ranges.

ORDERING CODE

MS3707G - -

Model _____

Power Supply _____
A: 100 to 240V AC (50 to 60Hz)
D: 24V DC **P:** 100 to 240V DC


Input _____
 4 to 20mA DC from 2-wire transmitters

Output 1 _____
A: 4 to 20mA DC **1:** 0 to 10mV DC
D: 0 to 20mA DC **2:** 0 to 100mV DC
Z: Other DC current signal **3:** 0 to 1V DC
 4: 0 to 10V DC
 5: 0 to 5V DC
 6: 1 to 5V DC
 0: Other DC voltage signal

Output 2 _____
No code: None
The codes are the same as for Output 1.

Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.
 Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550Ω maximum for Output 1 and 350Ω maximum for Output 2.

Options _____
No code: None
/X: Special order
 * For non-standard options, ask MTT for availability.

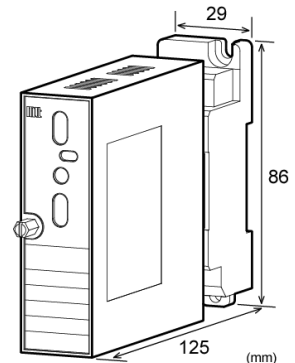
SPECIFICATIONS
POWER SECTION

Power Requirements	100 to 240V AC: 85 to 264V AC (47 to 63Hz) 24V DC: 24V DC±10% 100 to 240V DC: 85 to 264V DC		
Power Sensitivity	Better than ±0.1% of span for each power supply range.		
Power Line Fuse	160mA fuse is installed (standard).		
Power Consumption			
Power	100-240V AC	24V DC	100-240V DC
Single Output	7.0VA max	2.5W max	3.0W max
Dual Output	7.5VA max	2.7W max	3.0W max

INPUT SECTION

Input Signal	4 to 20mA DC from 2-wire transmitters		
Input Resistance	250Ω		
Transmitter Power Supply	Output voltage: 24 to 28V (0% input) 18V min. (100% input) Maximum current: 22mA, typical.		
Limit Current for Short-Circuit Protection	40mA max.		
Permissible Short-Circuit Duration	Continuous.		

OUTPUT SECTION

Maximum Output Load		
Voltage Output (DC)	1V span and up 10mV 100mV	2mA max. 10kΩ min. 100kΩ min.
Current Output (DC)	4-20mA single output 4-20mA dual output	750Ω max. Output 1: 550Ω max. Output 2: 350Ω max.
Zero Adjustment	Approx. ±10% of span. (Adjustable by the front-accessible trimmer.)	
Span Adjustment	Approx. 10 to 100% of span. (Adjustable by the front-accessible trimmer and rotary switch.)	

ORDERING INFORMATION

To place an order, please use the ordering code format as shown above.
 (e.g.) MS3707G-A-A6
 Factory adjustments are made with 0-100% input / 0-100% output. For any other input ranges, specify the range as indicated below.
 (e.g.) For 0-50% input / 0-100% output:
 MS3707G-A-A6 (Input: 0 to 50%)
 Zero and span adjustments are made to your specified input range, but shipping inspection is performed with 0-100% input / 0-100% output.

Another Ordering Example:
 For an output code of "0": MS3707G-A-60 (Output: 2 to 5V)

Zero Adjustment for Output 2	Approx. $\pm 2\%$ of span. (Adjustable by the front-accessible trimmer.)	
Span Adjustment for Output 2	Approx. $\pm 2\%$ of span. (Adjustable by the front-accessible trimmer.)	
Ranges Available		
	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	0 to 10V
Output Span (DC)	4 to 20mA	10mV to 10V
Output Bias	0 to 100%	0 to 100%
* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.		
Output Spec. Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.		
Output Spec. Ex. 2: For 4 to 8V output, the output span is 4V and the bias +100%.		

● PERFORMANCE

Accuracy Rating	Better than $\pm 0.1\%$ of span (at $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$). * Gain = 1
Temperature Effect	Better than $\pm 0.2\%$ of span per 10°C change in ambient. * Gain = 1
Response Time	200ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	4-way isolation between input, output [Output 1/Output 2], power, and ground.
Insulation Resistance	100M Ω min. (@ 500V DC) between input, output [Output 1/Output 2], power, and ground.
Dielectric Strength	Input / Output [Output 1/Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.
Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C

● PHYSICAL


Installation	Wall/DIN rail mounting
Wiring	M3.5 screw terminal connection (with a power terminal block cover & drop-out prevention screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W29 x H86 x D125mm (including the mounting screw and socket)
Weight	Main unit: 120g max. Socket: 80g max.

● MATERIALS

Housing	ABS resin (UL-94V-0)
Terminal Block	PBT resin (UL-94V-0)
Terminal Block Cover	PC resin (UL-94V-2)
DIN Rail Stopper	PP resin (UL-94HB)
Screw Terminal	Nickel-plated steel
Contacts Material and Finish	Brass with 0.2 μm gold plating
Printed Circuit Board	Glass fabric epoxy resin (FR-4: UL-94V-0)
Anti-Humidity Coating	HumiSeal [®] 1A27NS (Polyurethane)


* HumiSeal[®] is a registered trademark of Chase Corporation.

TERMINAL ASSIGNMENT

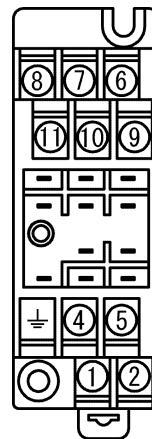


①	P (+)	POWER
②	N (-)	
⊥	GND	
④	+ OUTPUT 1	
⑤	- OUTPUT 1	
⑥	N.C.	
⑦	+ OUTPUT 2	
⑧	- OUTPUT 2	
⑨	+ INPUT	
⑩	- INPUT	
⑪	COM	

BLOCK DIAGRAM

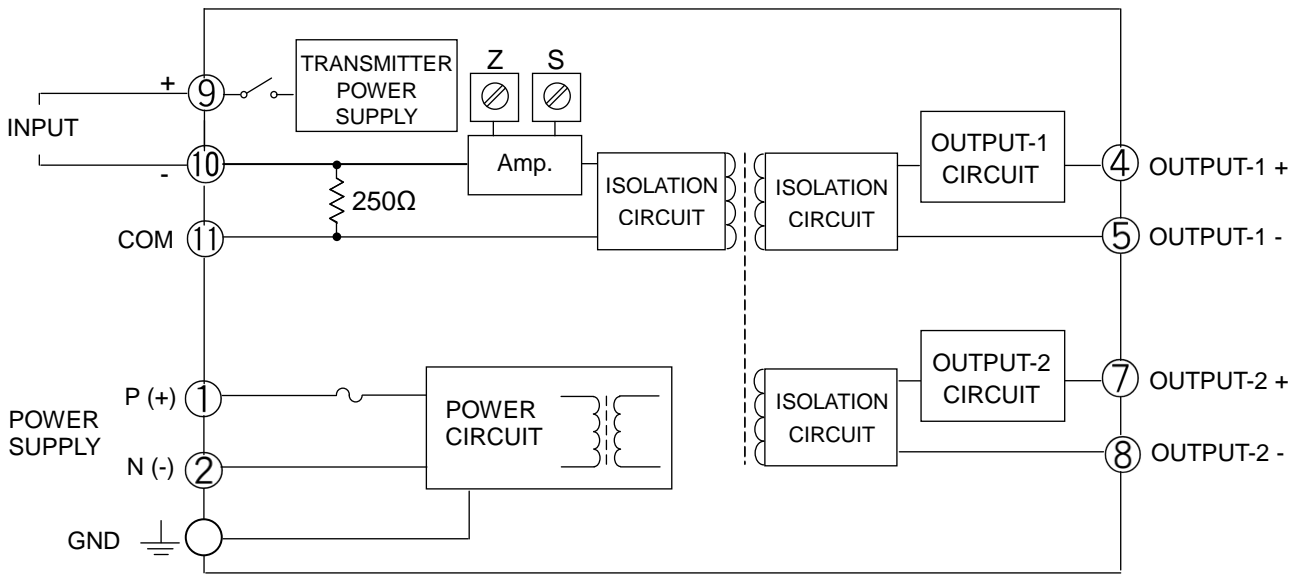

Used as a distributor:

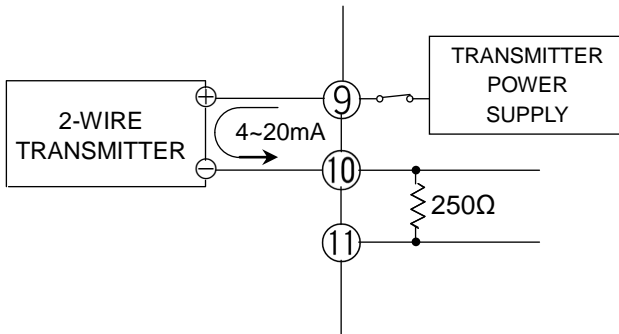

Used as an isolator:

